


FA 不燃性酸化金屬皮膜固定電阻器 FLAMEPROOF ACID METAL FILM RESISTOR

DIMENSION

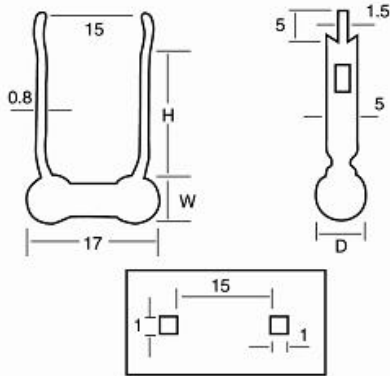

Style	Power Rating	D(mm)	W(mm)	H(mm)
FA3W-YC1	3W	7.5	7.0	15.0
FA3W-YC2	3W	7.5	7.0	25.5
FA5W-YC1	5W	7.5	7.0	15.0
FA5W-YC2	5W	7.5	7.0	25.5

SPECIFICATIONS

Style	Power Rating	Max Working Voltage	Max Overload Voltage	Max Intermittent Overload Voltage	Resistance Range	Tolerance
FA3W	3W	500V	600V	750V	1-100K	K(±10%) J(±5%)
FA5W	5W	500V	800V	1500V	1-10K	K(±10%) J(±5%)

CHARACTERISTICS

1. Because of the small size of the resistor, space can be utilized sufficiently.
2. Plugged terminals have the advantage of stability.
3. The design of terminals can help the heat resulted from the circuit board dissipate quickly.
4. For the sake of safety, we use non-inflammable paint.
5. The value of the electric induction is small, therefore it reflects well to high frequency.