


FR

保險絲電阻器 FUSIBLE RESISTOR

DIMENSION

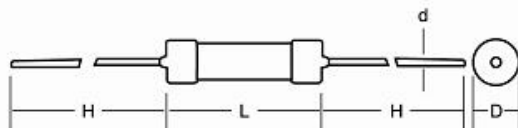

NOTES:

We can comply with the fusing time set by buyers but subject to notification in advance.

POWER	FUSING TIME
	Maximum
16 x Wattage	1 Min.
20	40 Sec.
24	30 Sec.
28	20 Sec.
32	15 Sec.

SPECIFICATIONS

額定電力 POWER RATING	最高使用電壓 MAXIMUM WORKING VOLTAGE	最高過負荷電壓 MAXIMUM OVERLOAD VOLTAGE	DIMENSIONS(mm)				RESISTANCE RANGE
			L	D	H	d±0.05	
1/4W	200V	300V	6.0±0.5	2.3±0.5	28±2.0	0.45	1Ω~1KΩ
1/2W	250V	400V	9.0±0.5	3.2±0.5	26±2.0	0.52	1Ω~1KΩ
1W	300V	500V	11.0±0.5	4.2±0.5	35±3.0	0.65	1Ω~1KΩ
2W	350V	500V	15.0±1.0	5.0±0.5	33±3.0	0.72	1Ω~1KΩ
3WS	350V	500V	15.0±1.0	5.0±0.5	33±3.0	0.72	1Ω~1KΩ

ELECTRICAL PERFORMANCE

Test Items	Condition	Spec.
Adhesion Solderability	230℃±5℃ for 3+0.5 sec	95%
Resistance Temp. Coeff.	-30℃~+155℃	±200PPM/℃
Short Time Overload	2.5 times of RCWV for 5 secs	±(2%+0.05Ω)
Dielectric Withstanding Voltage	Max Overload Voltage 1 Minute	±(0.5%+0.05Ω)
Temp. Cycling	-30℃/+85℃ for 5 cycles	±(1%+0.05Ω)
Insulation Resistance	D.C 500V	1000MΩ
Moisture-Proof Load Life	40℃ 95% RH 1.5 hrs on/0.5 hr off for 1000 hrs	±(5%+0.05Ω)

*RCWV" Rated Continuous Working Voltage