
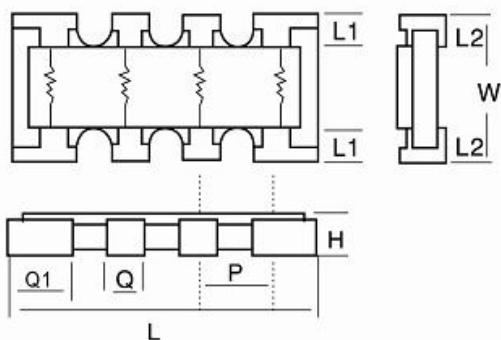



RA 厚膜晶片排列電阻器 (凸面型) THICK FILM CHIP RESISTOR ARRAYS(CONVEX)

(0402 4 Elements 024R)

(0603 4 Elements 034R)

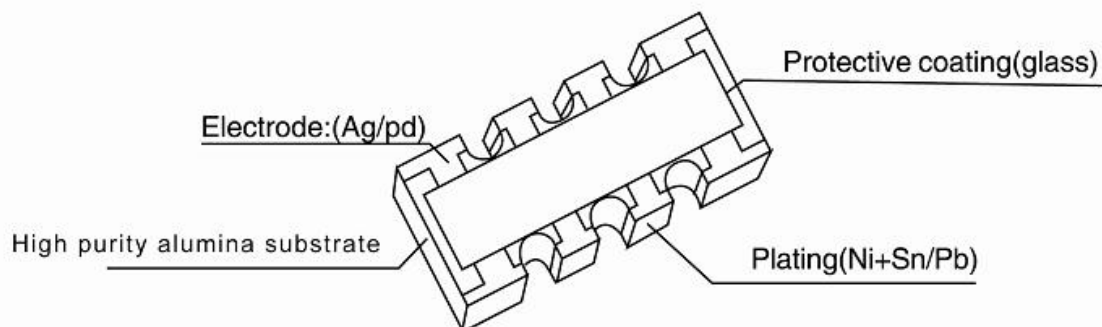

Equivalent Circuit Diagram



Unit : mm

DIMENSION	L	W	H	L1	L2	P	Q	Q1
TYPE								
024R(0402)	2.00±0.10	1.00±0.10	0.40±0.10	0.20±0.10	0.20±0.10	0.50±0.10	0.30±0.10	0.43±0.10
034R(0603)	3.20±0.20	1.60±0.15	0.50±0.10	0.30±0.20	0.30±0.20	0.80±0.20	0.50±0.10	0.61±0.10



RATINGS

TYPE	Power Rating at 70℃	Rate Current of Jumper(A)	Max Working Voltage	Max Over Load Voltage	TCR (PPM/℃)	Resistance Tolerance	Resistance Range (Ω)	Operating Temperature
024R	0.063W	1A	50V	100V	±200	JUMPER	below 50m	-55℃~+125℃
						±1%	10~1M	
						±5%	10~1M	
034R	0.1W	1A	50V	100V	±200	JUMPER	below 50m	-55℃~+125℃
						±1%	10~1M	
						±5%	10~1M	


RA 厚膜晶片排列電阻器 (凹面型) THICK FILM CHIP RESISTORS ARRAYS(CONCAVE)

(0402 4 Elements 024C)

(0603 4 Elements 034C)

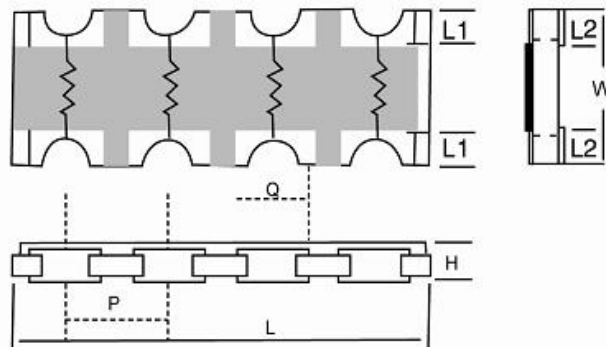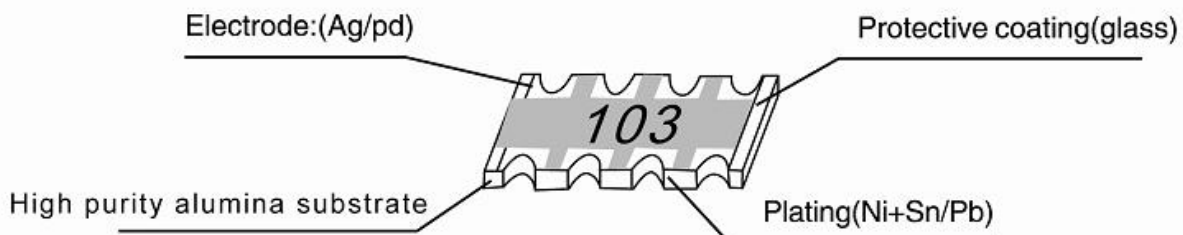

Equivalent Circuit Diagram



Unit: mm

DIMENSION TYPE	L	W	H	L1	L2	P	Q
024C(0402)	2.00±0.10	1.00±0.10	0.40±0.10	0.15±0.10	0.20±0.10	0.50±0.10	0.30±0.10
034C(0603)	3.20±0.20	1.60±0.20	0.50±0.10	0.35±0.20	0.40±0.20	0.80±0.10	0.40±0.10

RATINGS

TYPE	Power Rating at 70°C	Rate Current of Jumper(A)	Max Working Voltage	Max Over Load Voltage	TCR (PPM/°C)	Resistance Tolerance	Resistance Range (Ω)	Operating Temperature
024C	0.063W	1A	50V	100V	±200	JUMPER	below 50m	-55°C~+125°C
						±1%	10~1M	
						±5%	10~1M	
034C	0.1W	1A	50V	100V	±200	JUMPER	below 50m	-55°C~+125°C
						±1%	10~1M	
						±5%	10~1M	